

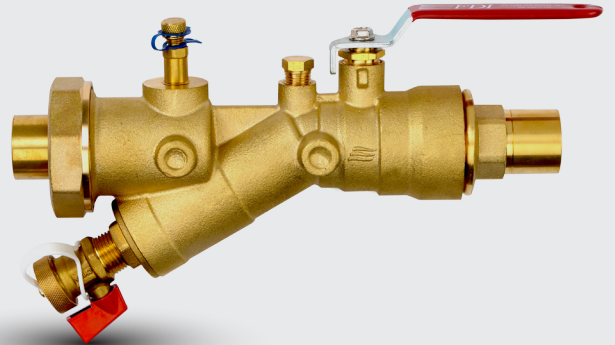
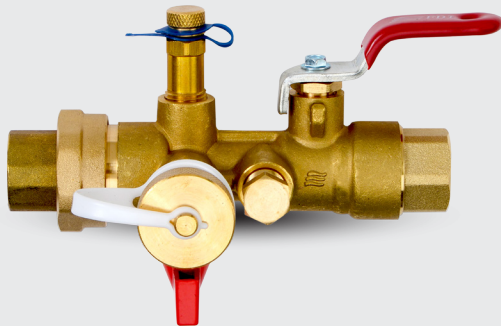


HU - 1M - 11M

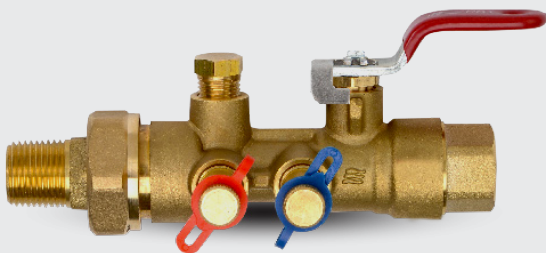


Manual Balancing
Complete Coil Hook-up Packages

Engineering
GREAT Solutions

HU - 1M - 11M

Pre-configured hook-ups with manual balancing valves.

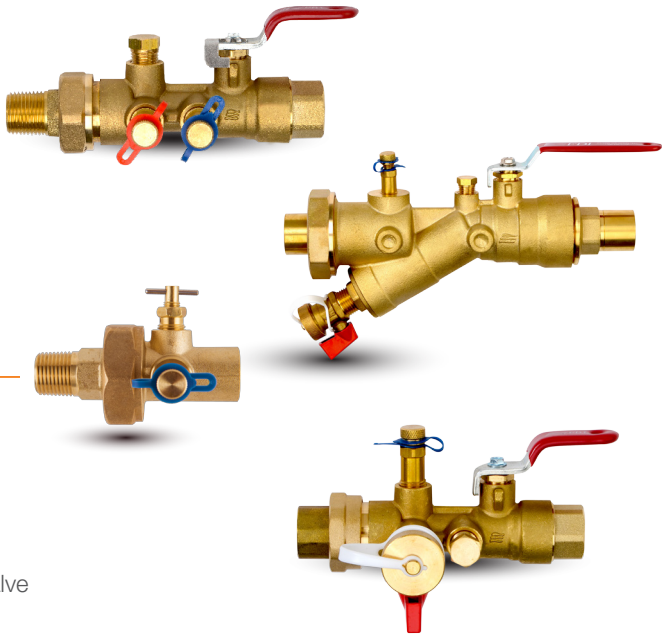

Key features

- > **Supply**







 - Ball Valve
 - 20 Mesh Strainer
 - Drain Valve with Hose End & Cap
 - Pressure/Temperature Port
 - Union Connection to Coil
- > **Return**

 - Union Connection to Coil
 - Pressure/Temperature Port
 - Manual Air Vent
 - Union Connection from Control Valve
 - Manual Venturi Balancing Valve







Technical description

Application: Hydronic Balancing	Dimensions: 1/2" - 2"	Accuracy: ±3%
Functions: Balancing, shut-off	Rating: 600 psig at 250° F (40 Bar at 120° C)	Material: Body: DZR Brass Union (Optional): Brass with EPDM O-ring Fixed Connection: DZR Brass







HU-1M thru 3M Models

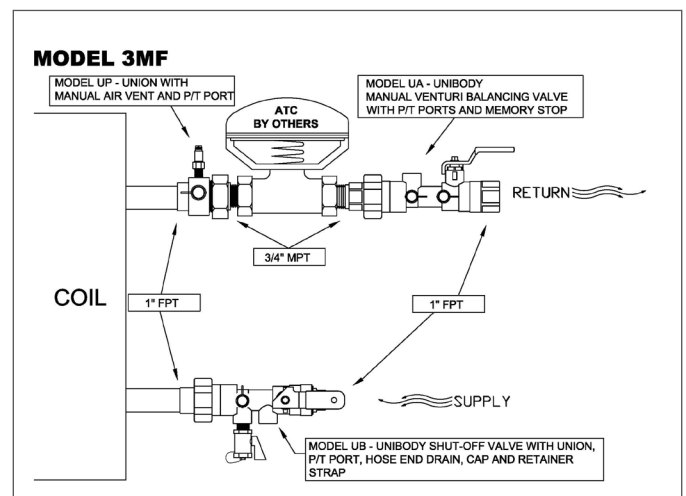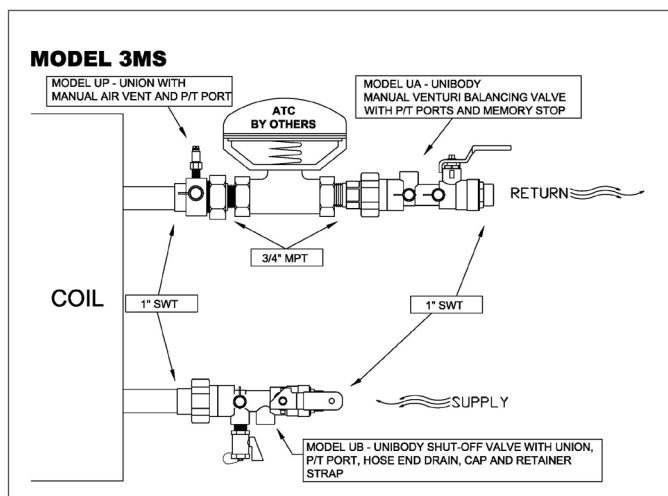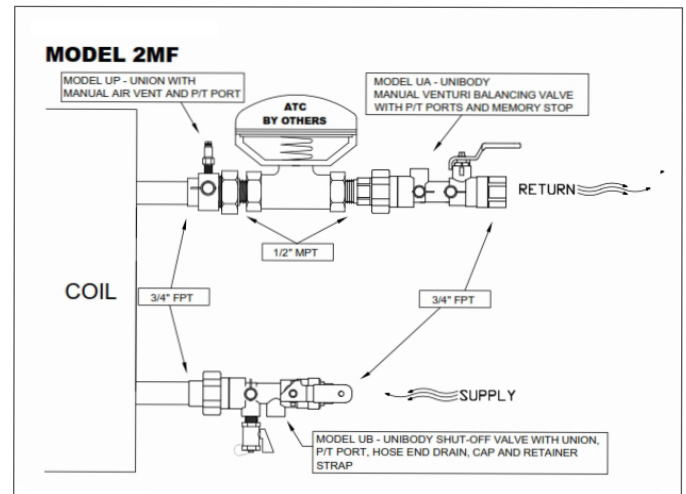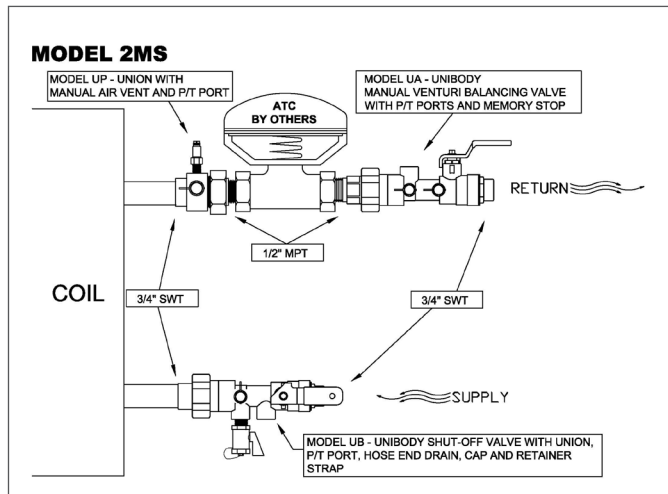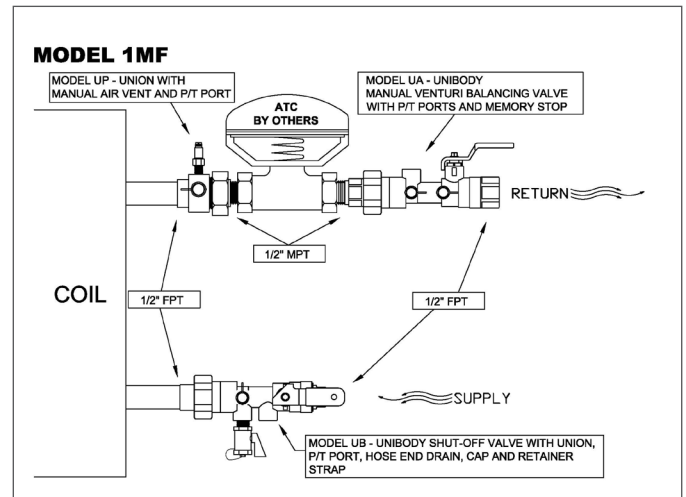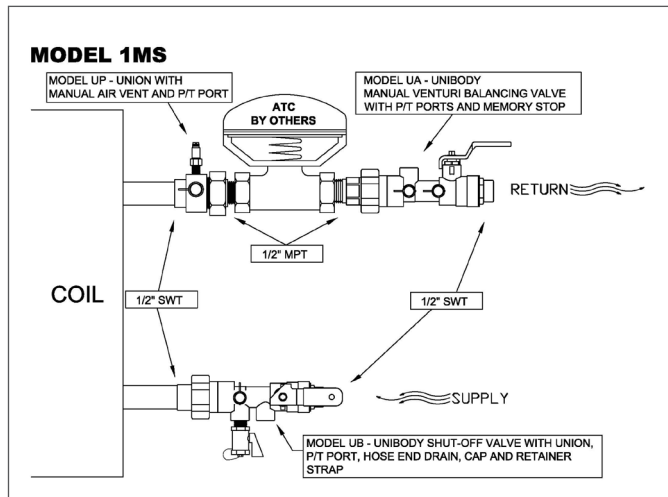





HU-4M thru 6M Models

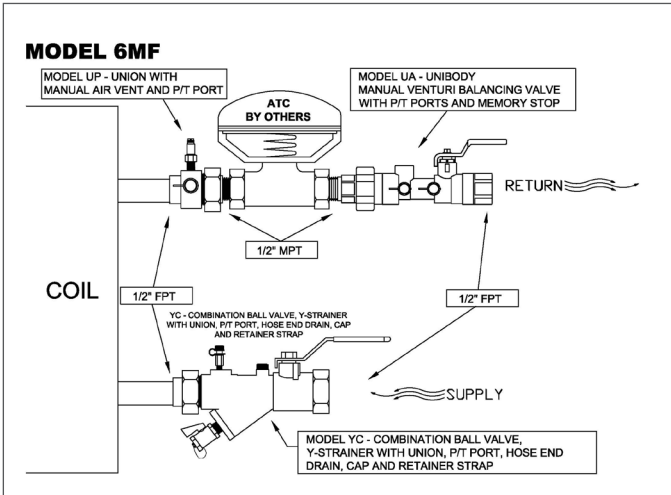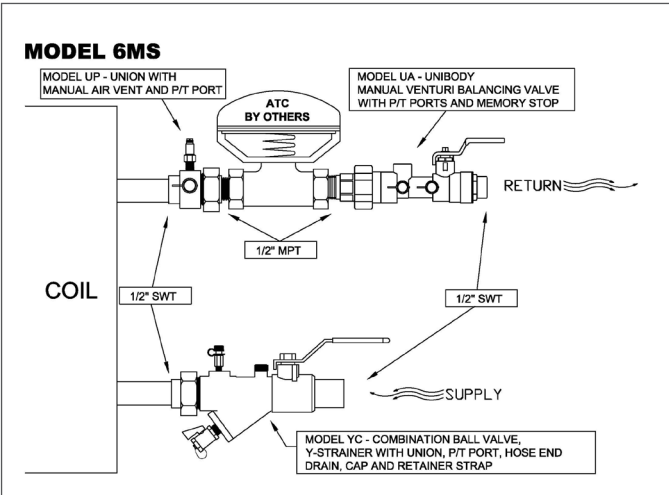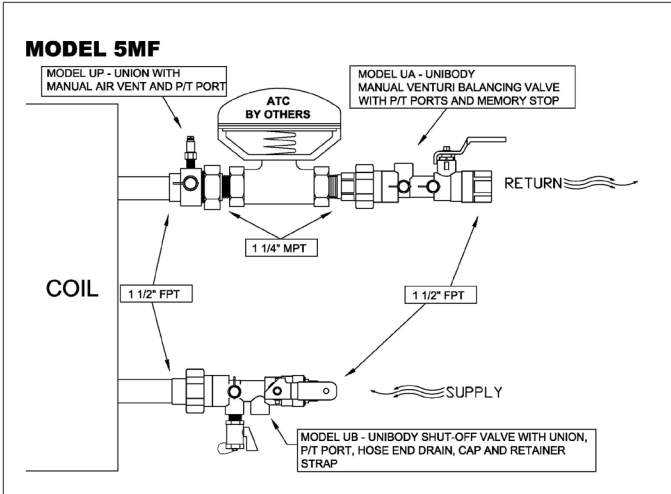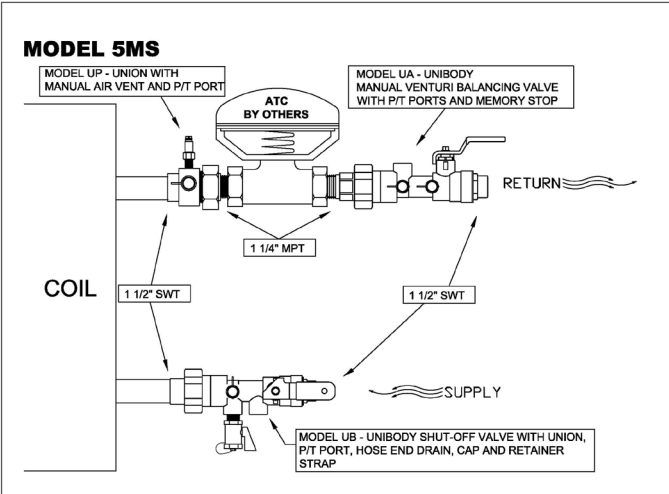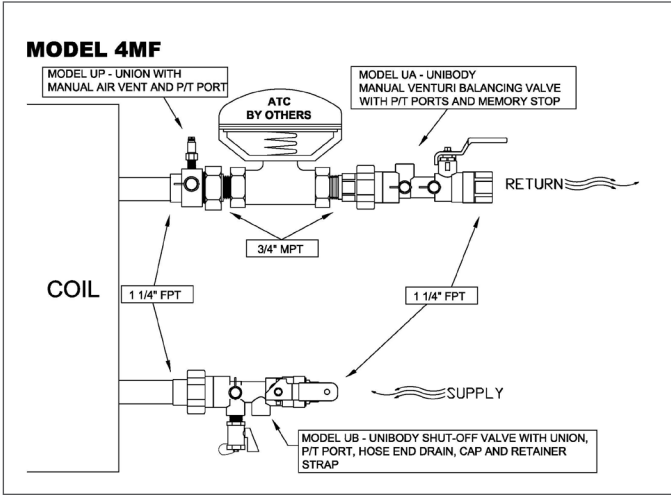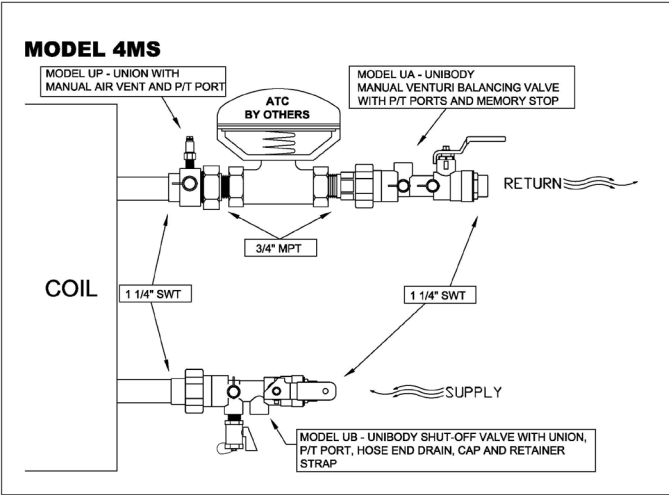

HU-7M thru 9M Models

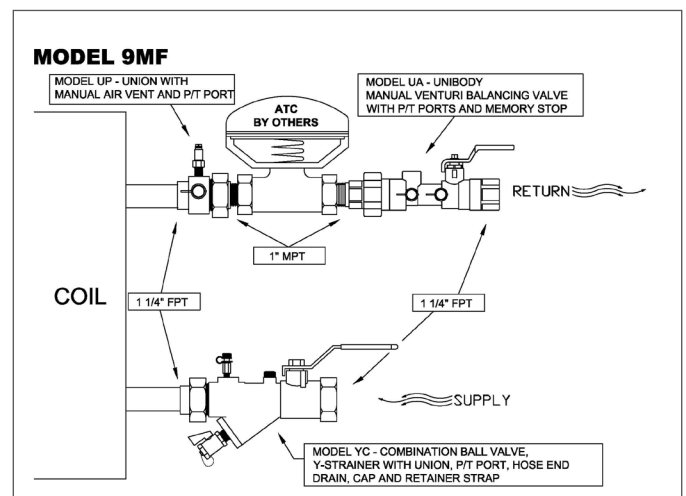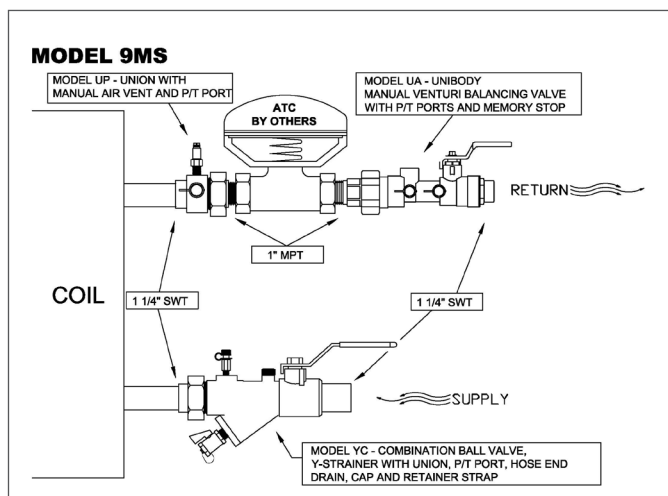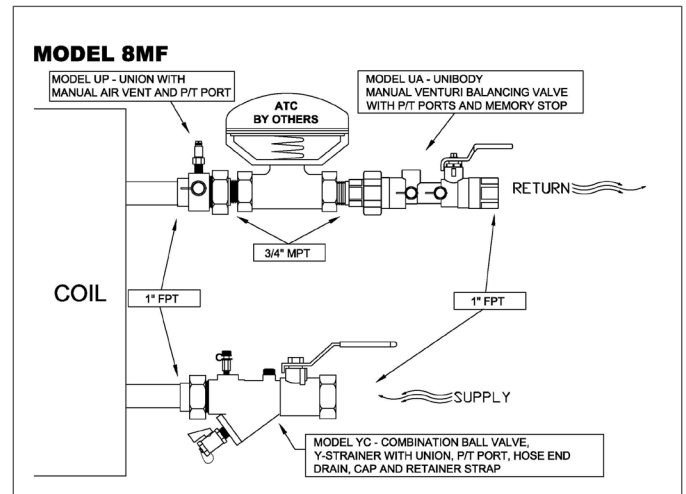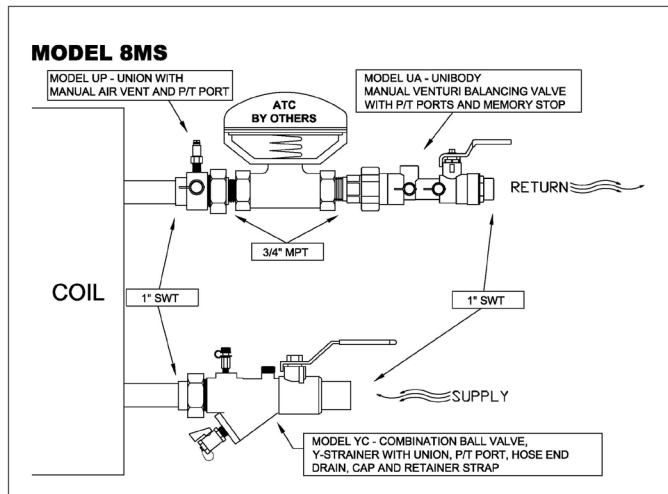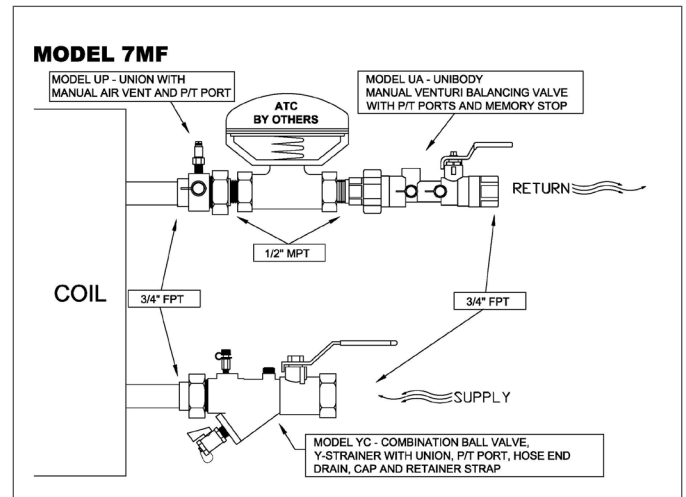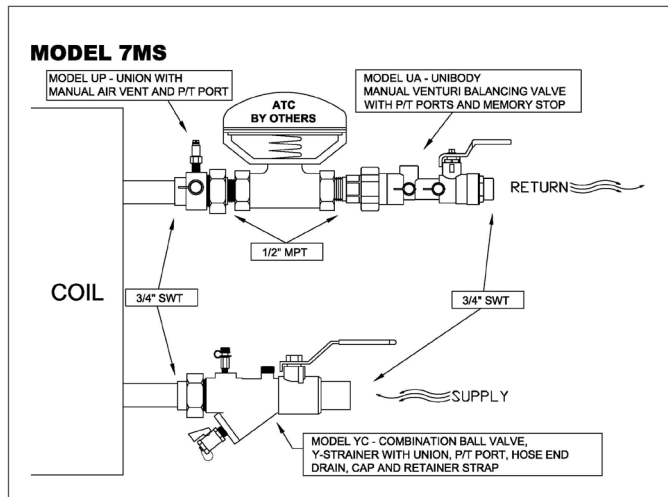

HU-10M thru 11M Models

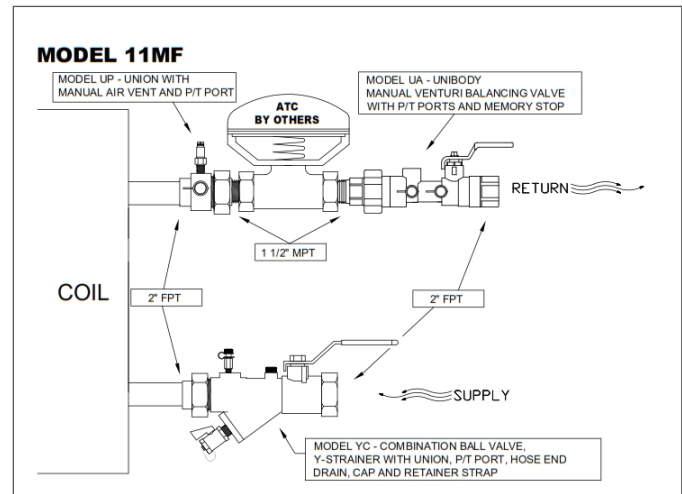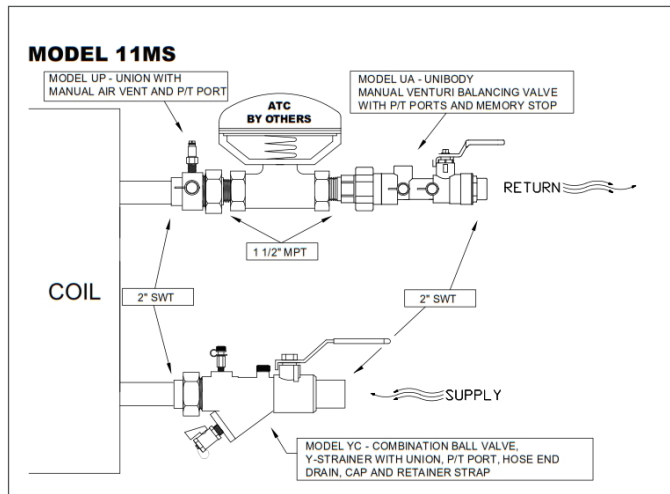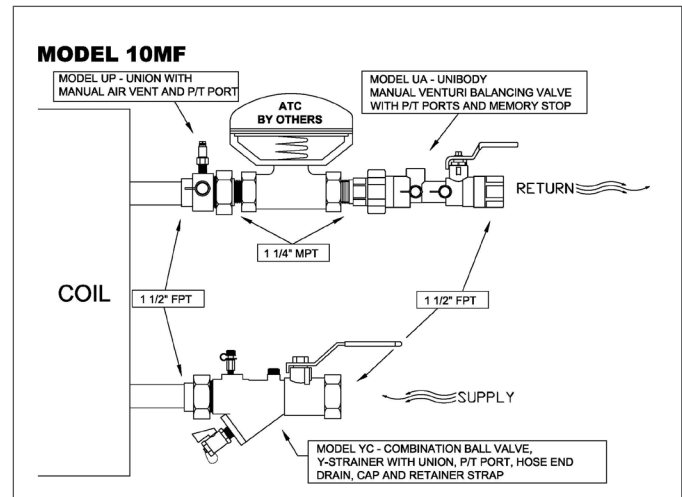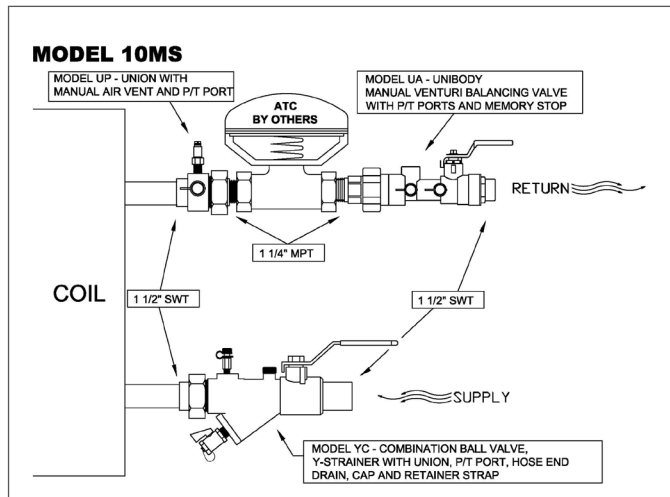

Notes

Pricing includes "Bag & Tag"

HU-MS - Sweat Connection

HU-MF - Female Pipe Thread Connection

Model Order Designation

Model Name

Use on all hook-up packages

Flow Rate

*Use to designate flow rate
Rate shown in gpm*

HU - 1MF - 0.50

Package Configuration

Use to show hook-up model number

S = female sweat

F = female thread

MT = male thread

Notes

